



Reggiani BOLT XS

Digital Single Pass Printer
for Textile Applications


Mass production moves to on-demand

Your true digital replacement for rotary

EFI™ Reggiani BOLT XS is the next generation textile single pass that integrates cutting-edge digital technology to move mass production to on-demand. Burst speed, boosted uptime and reliability, high performance throughout, unparalleled printing accuracy, and minimal maintenance needs make BOLT XS the best-in-class textile single pass printer for overall equipment effectiveness.

EFI Reggiani BOLT XS delivers beyond your expectations with:

- ✓ **Unparalleled speed**
the only digital printer to reach a 328 ft/min (100 m/min) operational speed
- ✓ **Continuous operation and uptime**
thanks to minimal downtime for maintenance
- ✓ **Ultra-compact footprint**
for more production capacity in less space
- ✓ **Astonishing printing results**
with superior coverage and better printing uniformity
- ✓ **Low Total Cost of Ownership**
thanks to high productivity and unmatched reliability

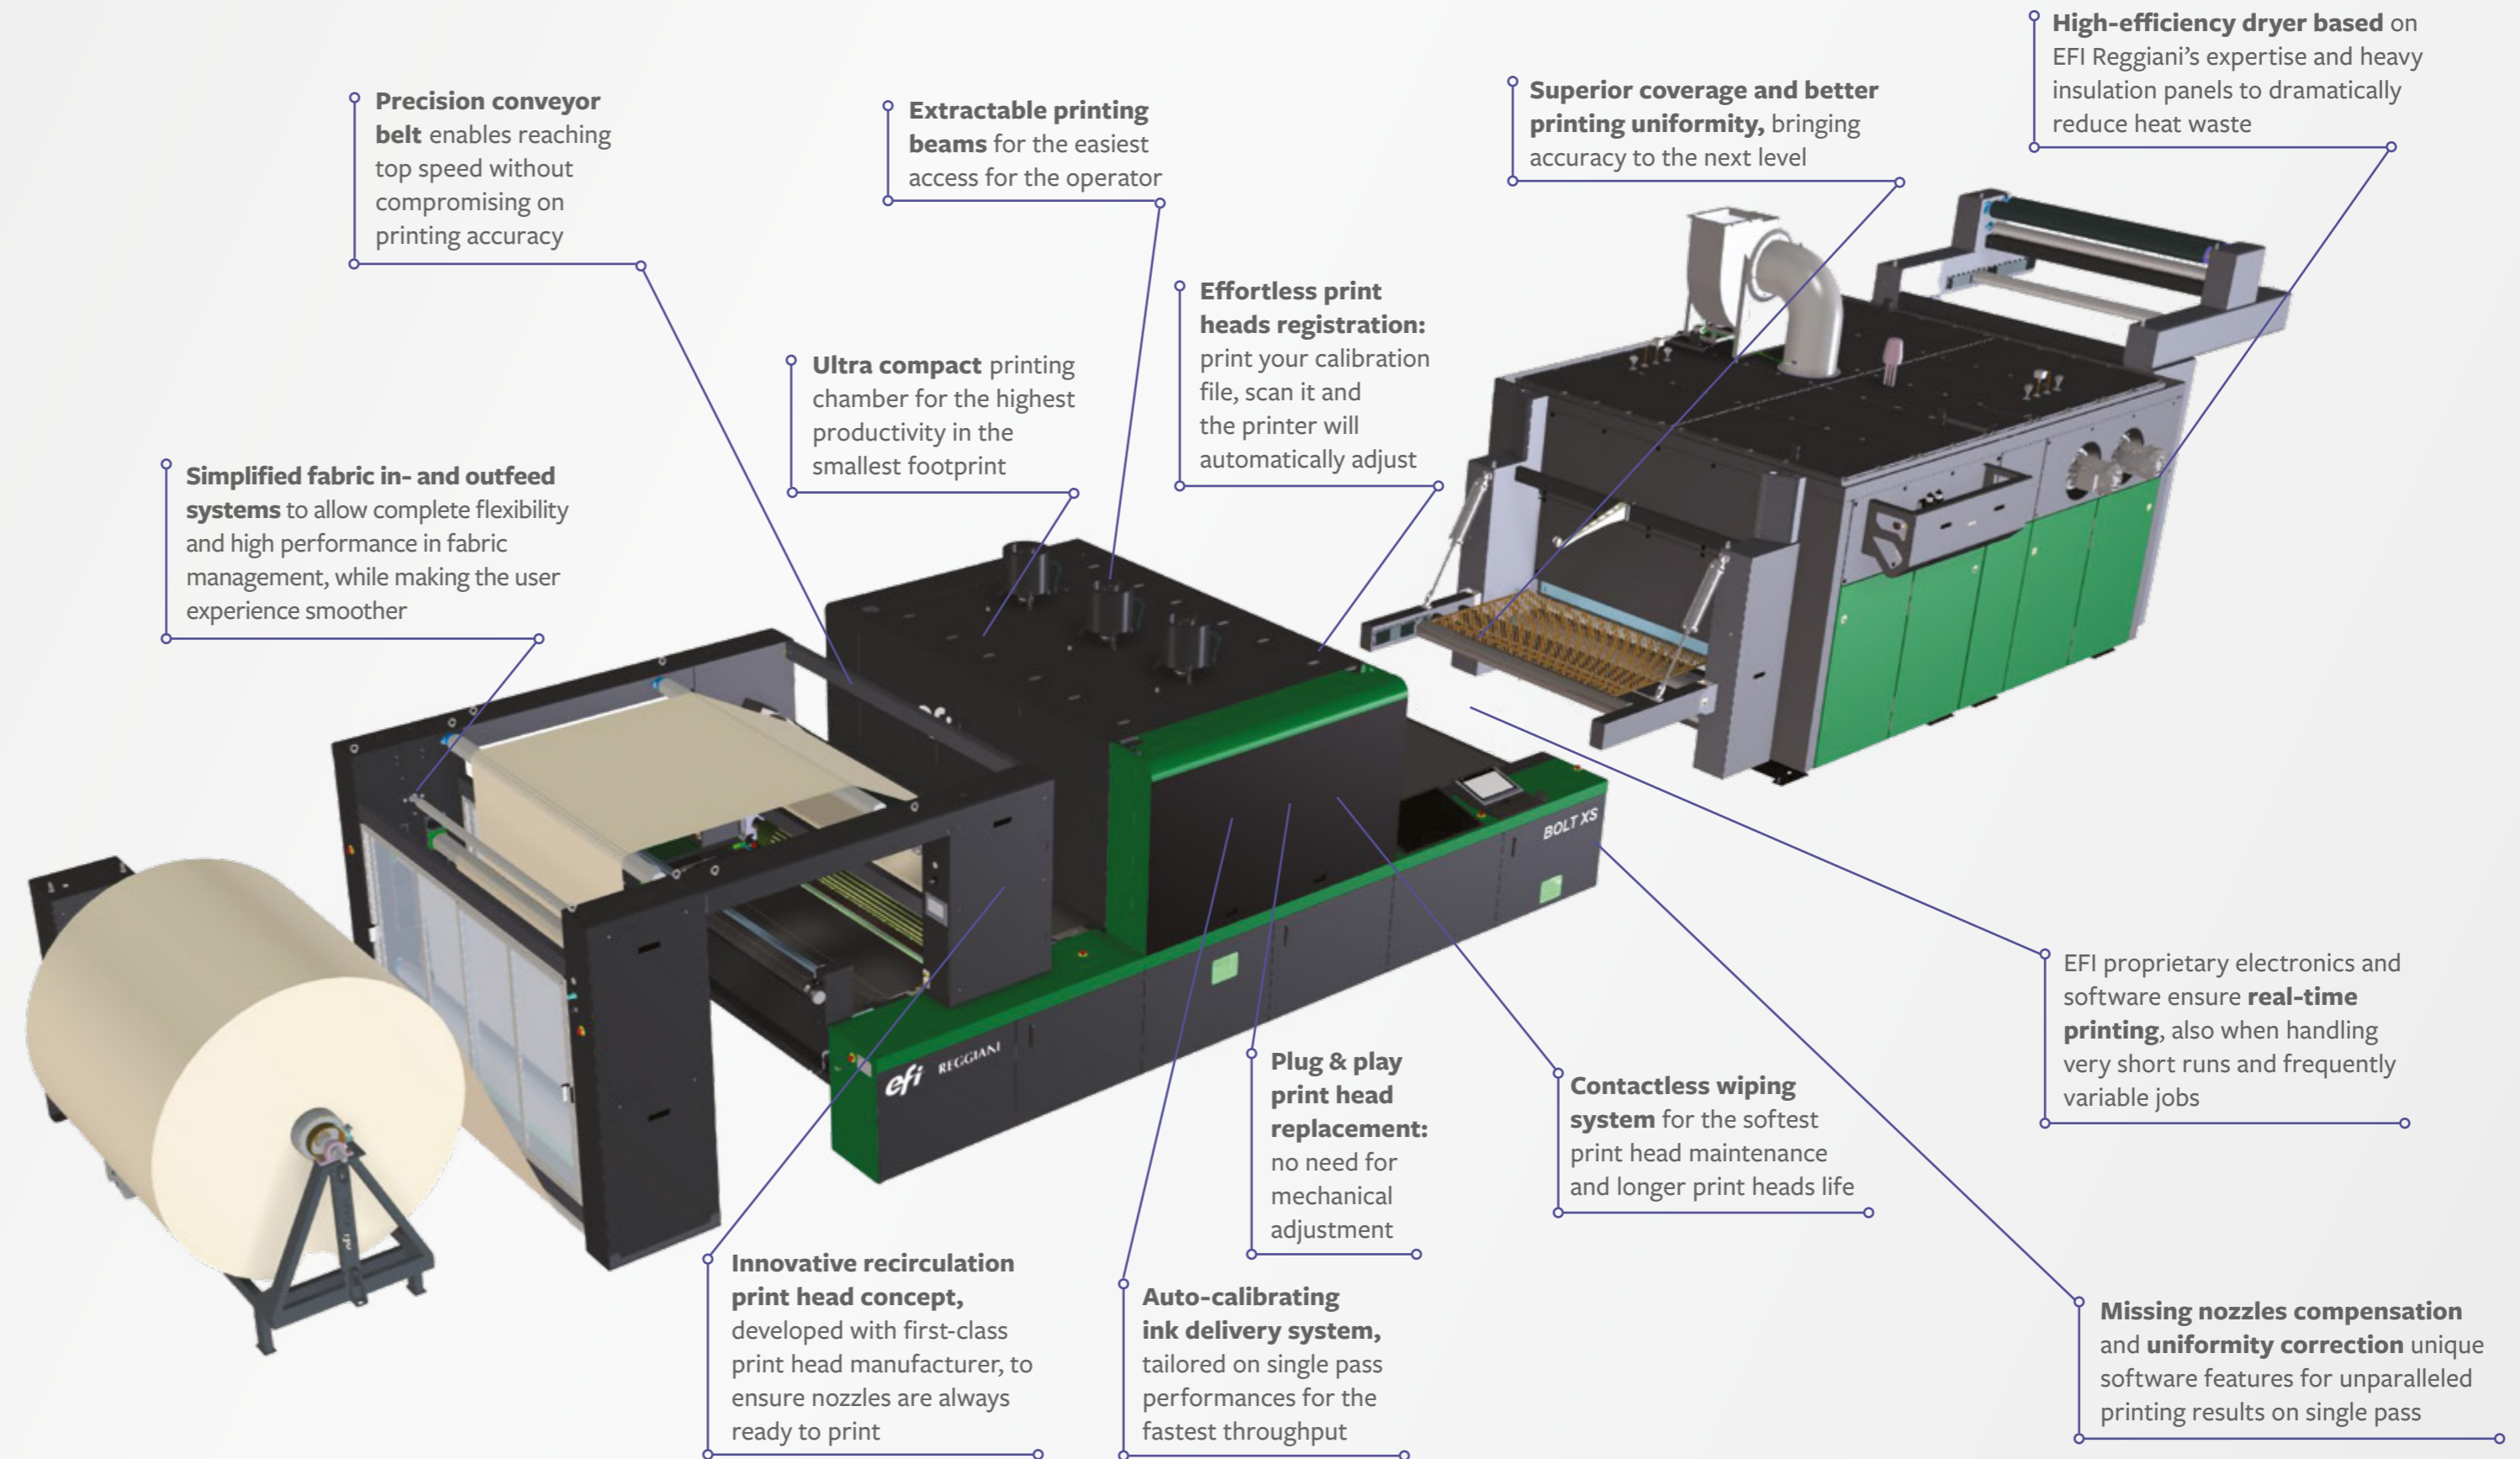

EFI Reggiani BOLT inks

The fuel to boost BOLT XS printing performance

These eco-friendly, water-based inks are designed and optimized for BOLT XS print head technology to ensure extraordinary durability and uniformity, longer print head life, and brilliant colors.

Main benefits

- Excellent runnability
- Extended color gamut
- High fastness properties
- Full color range
- High standard continuous quality control

Fiery technology drives BOLT XS to deliver print quality beyond your expectations

The Fiery® digital front end is built to deliver superior screening, professional color management, instant and cost-efficient sampling, and the technology to produce the finest print quality with the highest productivity.

- Integrated digital front end, RIP, and color workflow
- Textile design, sampling, and production tools
- Extensive color management solution
- Fiery bladed hardware for high performance
- Enabling missing nozzles compensation and uniformity correction features

Technical data

SPECIFICATIONS	
Printing method	Single pass inkjet printer
N. of colors	From 4 to 8
Printing speed	Up to 1,615 ft ² /min (150 m ² /min)
Print heads	Up to 28 per color
Print resolution	Up to 600 x 4800 dpi
Drop size	Variable from 5 to 30 picolitres
Printer body dimensions (L x W x H)	Approximately 23 ft x 20 m x 13 m (7 m x 6 m x 4 m) (8 colors configuration)
Fabric width	Maximum fabric width 77 in (1,950 mm), net print width 72 in (1,840 mm)
Substrates	Woven and knitted fabrics
Fabric feed and take up	Precision in- and outfeed system Fold and big roll maximum ø 79 in (2,000 mm) options available. Suitable for A-frame
Dryer	High-efficiency dryer from two to six sections up to five passages Heating sources available: gas, oil, and steam
RIP software	Fiery integrated inside the printer; Inèdit offline (optional)
GENUINE EFI REGGIANI INKS	
Reactive	Further ink classes coming soon

EFI Reggiani reserves the right to modify, at any moment and without prior notice, the data and technical specifications published herein.

Let's be brilliant. Together.

We understand you want breakthrough technologies to lead you through your digital journey. That's why we're passionate about driving your business growth with a scalable portfolio of products, solutions, services, support, and world-class partnerships for the manufacturing of signage, packaging, textiles, ceramic tiles, and building materials with a wide range of printers and inks. Our unwavering commitment is to increase your profits, cut costs, improve productivity, and optimize efficiency — job after job, year after year. We're obsessed with your success. And we definitely believe we have the right people, technology and experience to help your business achieve its goals. Visit www.efi.com/reggiani or send an email to info@efi.com for more information.



Nothing herein should be construed as a warranty in addition to the express warranty statement provided with EFI products and services.

AutoCal, Best Eye, ColorGuard, ColorPASS, ColorRight, ColorWise, Command WorkStation, Cretachrom, Cretaprint, the Cretaprint logo, Cretaprinter, Cretaroller, Divisional Graphics, Distancing Graphics, DocBuilder, Dynamic Wedge, EDOX, EFI, the EFI logo, Electronics For Imaging, FabriVU, Fast-4, FASTRIP, FASTDRIVE, Fiery, the Fiery logo, Fiery Compose, Fiery Driven, the Fiery Driven logo, Fiery Edge, Fiery Essential, Fiery HyperRIP, Fiery Impose, Fiery Impress, Fiery ImageViewer, Fiery Intensify, Fiery JobExpert, Fiery JobFlow, Fiery JobMaster, Fiery Navigator, Fiery Prep-it, Fiery Prints, the Fiery Prints logo, Fiery TrueBrand, FreeForm, Inktensity, Inkware, IQ, MicroPress, OneFlow, PressVu, PrintMe, the PrintMe logo, Prograph, ProGraphics, RIPChips, RIP-While-Print, SafeGuard Graphics, Spot-On, Spot Pro, UltraDrop, UltraPress, UltraTex, UltraVu, UV Series 50, VUTEK, the VUTEK logo, and WebTools are trademarks or registered trademarks of Electronics For Imaging, Inc. and/or its wholly owned subsidiaries in the U.S. and/or certain other countries.

All other terms and product names may be trademarks or registered trademarks of their respective owners and are hereby acknowledged.

© 2023 ELECTRONICS FOR IMAGING, INC. ALL RIGHTS RESERVED. | WWW.EFI.COM

RE_08_11_23_US